


Product information



Product name: evospine®
area impacted: thoraco-lumbar spine Th9 to S1
surgical approach: MIS percutaneous | Wiltse mini open

Features/Design

1. methods of insertion
 - Screw with outer tube (outer diameter approx. \varnothing 14 mm)
 - Screw with dilatator set (outer diameter approx. \varnothing 16 mm)
2. less instruments due to long-arm screw head
4 step extender gradually reducible
3. cementable, polyaxial screw or monoaxial screw with 360° rotation
appropriate bone fillers for screw augmentation are available
4. screws: \varnothing 5.5 | 6.0 | 6.5 | 7.0 | 7.5 mm ; lengths: 35 | 40 | 45 | 50 | 55 | 60 mm
Rods: \varnothing 5.5 | 6.0 mm; lengths: 40 | 50 | 60 | 70 | 80 | 90 | 100 | 110 | 120 |
130 | 140 | 150 | 160 | 180 | 200 | 250 | 300 | 350 mm

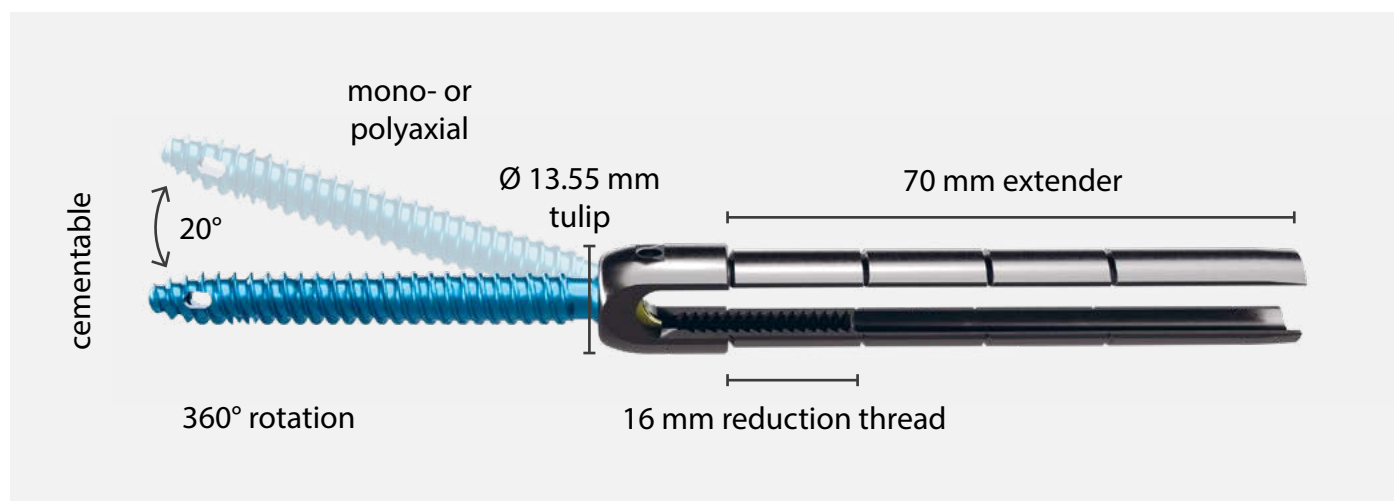

Implant information

Monoaxial screws

Size (mm)	Ø 6,0 mm
40	SR-D215-26040
45	SR-D215-26045
50	SR-D215-26050
55	SR-D215-26055

Polyaxial screws

Size (mm)	Ø 5,5 mm	Ø 6,5 mm	Ø 7,0 mm	Ø 7,5 mm
35	SR-D216-25535	SR-D216-26535	SR-D216-27035	SR-D216-27535
40	SR-D216-25540	SR-D216-26540	SR-D216-27040	SR-D216-27540
45	SR-D216-25545	SR-D216-26545	SR-D216-27045	SR-D216-27545
50	SR-D216-25550	SR-D216-26550	SR-D216-27050	SR-D216-27550
55	-	SR-D216-26555	SR-D216-27055	SR-D216-27555
60	-	SR-D216-26560*	-	-

* available only on request until further notice

Set screw

SR-B213-03095	evospine set screws for poly and mono screws
---------------	--

Break-off-nut

SR-B216-01095	Self-breaking set screw, sterile
---------------	----------------------------------

Rods Ø 6,0 mm

Ref.	Size
Rods, straight	
SR-C217-26040	Ø 6,0 x 40 mm
SR-C217-26050	Ø 6,0 x 50 mm
SR-C217-26060	Ø 6,0 x 60 mm
SR-C217-26070	Ø 6,0 x 70 mm
SR-C217-26080	Ø 6,0 x 80 mm
SR-C217-26090	Ø 6,0 x 90 mm
SR-C217-26100	Ø 6,0 x 100 mm
SR-C217-26110	Ø 6,0 x 110 mm
SR-C217-26120	Ø 6,0 x 120 mm
SR-C217-26130	Ø 6,0 x 130 mm
SR-C217-26140	Ø 6,0 x 140 mm
SR-C217-26150	Ø 6,0 x 150 mm
SR-C217-26160	Ø 6,0 x 160 mm
SR-C217-26180	Ø 6,0 x 180 mm
SR-C217-26200	Ø 6,0 x 200 mm
SR-C217-26250*	Ø 6,0 x 250 mm
SR-C217-26300*	Ø 6,0 x 300 mm
SR-C217-26350*	Ø 6,0 x 350 mm

Ref.	Size
Rods, curved	
SR-C218-26040*	Ø 6,0 x 40 mm
SR-C218-26050*	Ø 6,0 x 50 mm
SR-C218-26060*	Ø 6,0 x 60 mm
SR-C218-26070*	Ø 6,0 x 70 mm
SR-C218-26080*	Ø 6,0 x 80 mm
SR-C218-26090*	Ø 6,0 x 90 mm
SR-C218-26100*	Ø 6,0 x 100 mm
SR-C218-26110*	Ø 6,0 x 110 mm
SR-C218-26120*	Ø 6,0 x 120 mm
SR-C218-26130*	Ø 6,0 x 130 mm
SR-C218-26140*	Ø 6,0 x 140 mm
SR-C218-26150*	Ø 6,0 x 150 mm
SR-C218-26160*	Ø 6,0 x 160 mm
SR-C218-26180*	Ø 6,0 x 180 mm
SR-C218-26200*	Ø 6,0 x 200 mm

* available only on request until further notice



Note: Additionally Ø 5,5 mm is available for all rods on request.

